
## WT70-FC

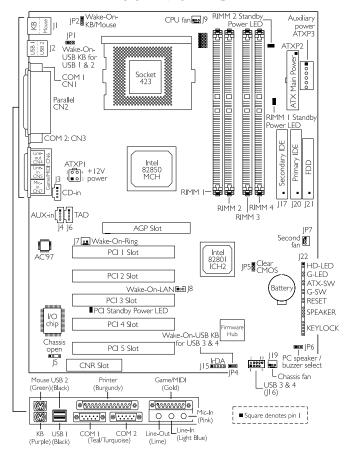

 $\label{eq:Wake-On-USB Keyboard - |P| and |P4: 1-2 On: Disabled (default); 2-3 On: Enabled Regardless of the USB port (USB 1, 2, 3 or 4) used, these jumpers' settings must be identical.}$ 

PC Speaker / Buzzer Select - IP6: I-2 On: Buzzer (default); 2-3 On: PC speaker

Clear CMOS Data - IP5: 1-2 On: Normal (default): 2-3 On: Clear CMOS Data IMake sure to power-off the system prior to clearing the CMOS data.

Wake-On-KB/Mouse - JP2: 1-2 On: Disabled (default); 2-3 On: Enabled

If you wish to disable the password set in the "KB Power On Password" field, make sure to set the "Keyboard/Mouse Power On" field to Disabled prior to setting this jumper to disabled You will not be able to boot up the system if you fail to do so.

LEDs: The RIMMs I and 2 Standby Power LEDs will turn red when the system's power is on or when it is in the Suspend state (Power On Suspend or Suspend to RAM). It will not light when the system is in the Soft-Off state. The PCI Standby Power LED will turn red when the system is in the power-on, Soft-Off or Suspend (Power On Suspend or Suspend to RAM) state. Lighted LEDs serve as a reminder that you must power-off the system then turn off the power supply's switch or unplug the power cord prior to installing any memory modules or add-in cards.

- If you are using the (1) Wake-On-KB/Mouse, (2) Wake-On-LAN and/or (3) Wake-On-Ring (internal modem) functions, the 5VSB power source of your power supply must support  $\geq$  720mA.
- If you are using the Suspend to RAM function, the 5VSB power source of your power supply must support ≥ IA
- If you are using the Wake-On-USB KB function for 2 USB ports, the 5VSB power source of your power supply must support ≥ 1.5A.
  If you are using the Wake-On-USB KB function for 4 USB ports, the 5VSB power source of your power supply must support ≥ 2A.